DOOR SCHEDULE

	DOOR INFORMATION							FRAME INFO.		HRDWR	UL LABEL	REMARKS
	NUMBER	WIDTH	HEIGHT	THICK	MAT'L	TYPE	GLASS	MAT'L	FINISH			
LOWER FLOOR	100	3'-0"	6'-8"	1-3/4"	HM	D	–	HM	PNT	–	–	–
	101A	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	101B	3'-0"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"C"	3/4 HOUR
	102	3'-0"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"C"	3/4 HOUR
	103	2'-8"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"C"	3/4 HOUR
	104	3'-0"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"C"	3/4 HOUR
	105A	3'-0"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"A"	3 HOUR
	105B	3'-0"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"A"	3 HOUR
	105C	3'-0"	6'-8"	1-3/4"	HM	D	–	HM	PNT	–	–	–
	106	3'-0"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"C"	3/4 HOUR
	107	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	108	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	109	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	110	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	111	3'-0"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"C"	3/4 HOUR
MAIN FLOOR	201	6'-0"	6'-8"	1-3/4"	AL	A	SAFETY	AL	–	–	–	INSULATED FRAME
	201A	6'-0"	6'-8"	1-3/4"	AL	A	SAFETY	AL	–	–	–	INSULATED FRAME
	201B	6'-0"	6'-8"	1-3/4"	WD	F	SAFETY	HM	PNT	–	–	–
	202	3'-0"	6'-8"	1-3/4"	WD	E	SAFETY	HM	PNT	–	–	–
	202A	3'-0"	6'-8"	1-3/4"	HM	D	–	HM	PNT	–	–	–
	203	3'-0"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"C"	3/4 HOUR
	204	3'-0"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"C"	3/4 HOUR
	205	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	205A	2'-8"	6'-8"	1-3/4"	WD	E	SAFETY	HM	PNT	–	–	–
	206	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	207	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	208	3'-0"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"A"	3 HOUR
	209	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	210	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	211	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	212	3'-0"	6'-8"	1-3/4"	WD	C	–	HM	PNT	–	"A"	3 HOUR
STAIRS	A1	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	A2	3'-0"	6'-8"	1-3/4"	HM	D	–	HM	PNT	–	–	–
	A3	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR
	B1	3'-0"	6'-8"	1-3/4"	WD	E	WIRE	HM	PNT	–	"C"	3/4 HOUR

ROOM FINISH SCHEDULE

	ROOM		FLOOR		BASE	WALLS		CEILING			TRIM		REMARKS
	NUMBER	NAME	SUB FLR.	FINISH		MAT'L	FINISH	MAT'L	FINISH	HEIGHT	MAT'L	FINISH	
LOWER FLOOR	100	CLASSROOM	CONC	C	V	GPDW	PNT	ACT	–	7'-6"	MET	PNT	
	101	VESTIBULE	CONC	VCT	V	GPDW	PNT	ACT	–	7'-6"	MET	PNT	
	101A	MECHANICAL	CONC	SLR	–	CMU	PNT	GPDW	PNT	7'-11"	MET	PNT	
	102	ELECTRICAL ROOM	CONC	SLR	–	CMU	PNT	GPDW	PNT	7'-11"	MET	PNT	
	103	STORAGE	EX	EX	EX/V	EX/GPDW	PNT	EX	PNT	EX	MET	PNT	
	104	FURNACE ROOM	EX	VCT	V	GPDW	PNT	ACT	–	7'-6"	MET	PNT	
	105	CORRIDOR	CONC	VCT	V	GPDW	PNT	ACT	–	7'-2"+/-	MET	PNT	
	106	UNIISEX TOILET	CONC	VCT	V	GPDW	PNT	ACT	–	7'-6"	MET	PNT	
	107	CLASSROOM	CONC	VCT	V	GPDW	PNT	ACT	–	7'-6"	MET	PNT	
	108	YOUTH CLASSROOM	CONC	VCT	V	GPDW	PNT	ACT	–	7'-6"	MET	PNT	
	109	CLASSROOM	CONC	VCT	V	GPDW	PNT	ACT	–	7'-6"	MET	PNT	
	110	CLASSROOM	CONC	VCT	V	GPDW	PNT	ACT	–	7'-6"	MET	PNT	
	111	MECHANICAL	CONC	SLR	–	GPDW	PNT	GPDW	–	7'-11"	MET	PNT	
MAIN FLOOR	200	GATHERING	WD	C	V	GPDW	PNT	GPDW	PNT	VARIES	–	–	
	201	ENTRANCE	WD	VCT	V	GPDW	PNT	GPDW	PNT	9'-0"	MET	PNT	
	202	VESTIBULE	EX	VCT	V	EX	PNT	EX	PNT	EX	MET	PNT	
	203	STORAGE	EX	VCT	EX/V	EX/GPDW	PNT	EX	PNT	EX	MET	PNT	
	204	UNISEX TOILET	EX	VCT	V	EX/GPDW	PNT	ACT	–	8'-0"	MET	PNT	
	205	INFANTS	WD	C	V	GPDW	PNT	ACT	–	8'-0"	MET	PNT	
	206	NURSERY #1	WD	C/VCT	V	GPDW	PNT	ACT	–	8'-0"	MET	PNT	
	207	TODDLERS	WD	C/VCT	V	GPDW	PNT	ACT	–	8'-0"	MET	PNT	
	208	CORRIDOR	WD	VCT	V	GPDW	PNT	ACT	–	8'-0"	MET	PNT	
	209	CLASSROOM	WD	C	V	GPDW	PNT	ACT	–	8'-0"	MET	PNT	
	210	CLASSROOM	WD	C	V	GPDW	PNT	ACT	–	8'-0"	MET	PNT	
	211	MOTHERS ROOM	WD	C	V	GPDW	PNT	ACT	–	8'-0"	MET	PNT	
	211	LIBRARY	WD	C	V	GPDW	PNT	ACT	–	8'-0"	MET	PNT	
STAIRS	A	STAIRS	CONC	VCT	V	GPDW	PNT	*	–	*	MET	PNT	* SEE BUILDING SECTION
	B	STAIRS	CONC	VCT	V	GPDW	PNT	*	–	*	MET	PNT	* SEE STAIR SECTION
	C	STAIRS	CONC	–	–	CONC	–	–	–	–	MET	PNT	* SEE STAIR SECTION

ABBREVIATIONS

ACT	ACOUSTICAL TILE	EX	EXISTING	V	VINYL
AL	ALUMINUM	GPDW	GYPSUM DRYWALL	VAR	VARIES
C	CARPET	HM	HOLLOW METAL	VCT	VINYL COMPOSITION TILE
CMU	CONCRETE MASONRY UNIT	MET	METAL	WD	WOOD
CONC	CONCRETE	PNT	PAINT		

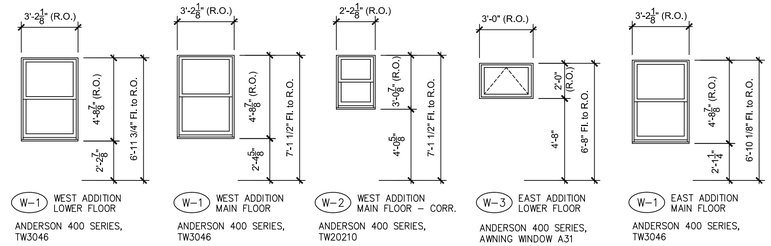

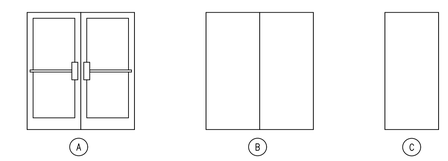

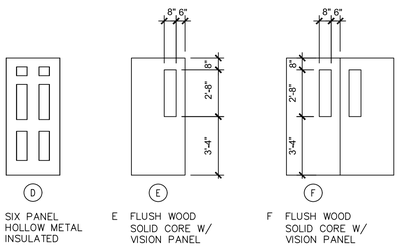

DOOR SCHEDULE

SCALE: 1/4" = 1'-0"

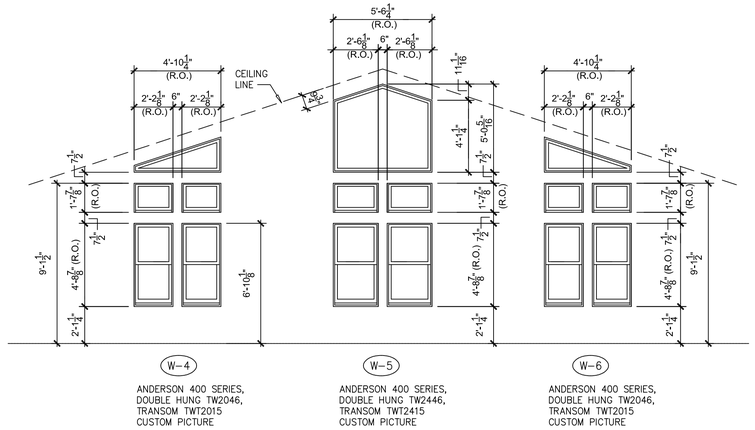

WINDOW SCHEDULE

SCALE: 1/4" = 1'-0"